


# North American Cords & Cord Sets



North American cords are keyed by the National Electric Manufacturers Association (NEMA) Configurations in relation to both current and voltage. All North American cords are UL and CSA approved. The outside of factory sealed boxes are marked with the CSA logo and Hologram UL label. On each power cord there will be a UL file number and a CSA logo on the plugs.

## ● NEMA 5-15P to IEC-60320-C13

APPROVALS: UL, CSA



NEMA 5-15P




IEC-60320-C13

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
* 2500.012	1'	18/3 SVT	Black	N. American	.230 - .265	10A/125V	
* 2500.015	1' 3"	18/3 SVT	Black	N. American	.230 - .265	10A/125V	
* 2500.018	1' 6"	18/3 SVT	Black	N. American	.230 - .265	10A/125V	
* 2500.024	2'	18/3 SVT	Black	N. American	.230 - .265	10A/125V	
* 2500.036	3'	18/3 SVT	Black	N. American	.230 - .265	10A/125V	
* 2500.060	5'	18/3 SVT	Black	N. American	.230 - .265	10A/125V	
* 2500.072	6'	18/3 SVT	Black	N. American	.230 - .265	10A/125V	
* 2500.090	7' 6"	18/3 SVT	Black	N. American	.230 - .265	10A/125V	
* 2500.096	8'	18/3 SVT	Black	N. American	.230 - .265	10A/125V	
* 2500.120	10'	18/3 SVT	Black	N. American	.230 - .265	10A/125V	
* 2500.180	15'	18/3 SVT	Black	N. American	.230 - .265	10A/125V	
* 2500.240	20'	18/3 SVT	Black	N. American	.230 - .265	10A/125V	
* 2500.300	25'	18/3 SVT	Black	N. American	.230 - .265	10A/125V	
2500.360	30'	18/3 SVT	Black	N. American	.230 - .265	10A/125V	
* 2501.072	6'	18/3 SVT	Grey	N. American	.230 - .265	10A/125V	
* 5001.072	6'	18/3 SJT	Black	N. American	.300 - .335	10A/125V	
5001.096	8'	18/3 SJT	Black	N. American	.300 - .335	10A/125V	
5001.108	9'	18/3 SJT	Black	N. American	.300 - .335	10A/125V	
5001.120	10'	18/3 SJT	Black	N. American	.300 - .335	10A/125V	
5001.180	15'	18/3 SJT	Black	N. American	.300 - .335	10A/125V	
* 5002.072	6'	18/3 SJT	White	N. American	.300 - .335	10A/125V	
5021.012	1'	16/3 SJT	Black	N. American	.335 - .360	13A/125V	
5021.024	2'	16/3 SJT	Black	N. American	.335 - .360	13A/125V	
* 5021.036	3'	16/3 SJT	Black	N. American	.335 - .360	13A/125V	
5021.048	4'	16/3 SJT	Black	N. American	.335 - .360	13A/125V	
5021.066	5' 6"	16/3 SJT	Black	N. American	.335 - .360	13A/125V	
* 5021.072	6'	16/3 SJT	Black	N. American	.335 - .360	13A/125V	
5021.090	7' 6"	16/3 SJT	Black	N. American	.335 - .360	13A/125V	
5021.096	8'	16/3 SJT	Black	N. American	.335 - .360	13A/125V	
5021.120	10'	16/3 SJT	Black	N. American	.335 - .360	13A/125V	
5021.144	12'	16/3 SJT	Black	N. American	.335 - .360	13A/125V	
5021.180	15'	16/3 SJT	Black	N. American	.335 - .360	13A/125V	
5021.240	20'	16/3 SJT	Black	N. American	.335 - .360	13A/125V	
5035.072	6'	16/3 SJTO	Black	N. American	.335 - .360	13A/125V	
* 5040.012	1'	14/3 SJT	Black	N. American	.360 - .395	15A/125V	
5040.018	1' 6"	14/3 SJT	Black	N. American	.360 - .395	15A/125V	
5040.024	2'	14/3 SJT	Black	N. American	.360 - .395	15A/125V	
* 5040.036	3'	14/3 SJT	Black	N. American	.360 - .395	15A/125V	
* 5040.048	4'	14/3 SJT	Black	N. American	.360 - .395	15A/125V	
5040.060	5'	14/3 SJT	Black	N. American	.360 - .395	15A/125V	
* 5040.072	6'	14/3 SJT	Black	N. American	.360 - .395	15A/125V	
* 5040.096	8'	14/3 SJT	Black	N. American	.360 - .395	15A/125V	
* 5040.120	10'	14/3 SJT	Black	N. American	.360 - .395	15A/125V	
5040.144	12'	14/3 SJT	Black	N. American	.360 - .395	15A/125V	
5040.180	15'	14/3 SJT	Black	N. American	.360 - .395	15A/125V	
5040.240	20'	14/3 SJT	Black	N. American	.360 - .395	15A/125V	
5040.300	25'	14/3 SJT	Black	N. American	.360 - .395	15A/125V	
* 7421.072	6'	18/3 SVT Shielded	Black	N. American	.230 - .265	10A/125V	
7421.096	8'	18/3 SVT Shielded	Black	N. American	.230 - .265	10A/125V	
7421.120	10'	18/3 SVT Shielded	Black	N. American	.230 - .265	10A/125V	
6010.072	6'	18/3 SJT Shielded	Black	N. American	.300 - .335	10A/125V	
6010.096	8'	18/3 SJT Shielded	Black	N. American	.300 - .335	10A/125V	
6010.120	10'	18/3 SJT Shielded	Black	N. American	.300 - .335	10A/125V	
7422.072	6'	16/3 SJT Shielded	Black	N. American	.335 - .360	13A/125V	
7422.096	8'	16/3 SJT Shielded	Black	N. American	.335 - .360	13A/125V	
7422.120	10'	16/3 SJT Shielded	Black	N. American	.335 - .360	13A/125V	
5043.072	6'	14/3 SJT Shielded	Black	N. American	.360 - .395	15A/125V	
5043.096	8'	14/3 SJT Shielded	Black	N. American	.360 - .395	15A/125V	
5043.118	9' 10"	14/3 SJT Shielded	Black	N. American	.360 - .395	15A/125V	
5043.120	10'	14/3 SJT Shielded	Black	N. American	.360 - .395	15A/125V	


\* This symbol means that these are our most commonly stocked items within a series. Look for this symbol throughout our catalog for fast shipment.

● NEMA 5-15P to IEC-60320-C13 - Continued

APPROVALS: UL, CSA



NEMA 5-15P




IEC-60320-C13


Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
* 2510.007	7"	18/3 SVT	Black		International	.230 - .265	10A/125V
2510.015	1' 3"	18/3 SVT	Black		International	.230 - .265	10A/125V
2510.036	3'	18/3 SVT	Black		International	.230 - .265	10A/125V
2510.072	6'	18/3 SVT	Black		International	.230 - .265	10A/125V
* 2510.090	7' 6"	18/3 SVT	Black		International	.230 - .265	10A/125V
2510.096	8'	18/3 SVT	Black		International	.230 - .265	10A/125V
2510.120	10'	18/3 SVT	Black		International	.230 - .265	10A/125V
2510.180	15'	18/3 SVT	Black		International	.230 - .265	10A/125V
2510.240	20'	18/3 SVT	Black		International	.230 - .265	10A/125V
2510.300	25'	18/3 SVT	Black		International	.230 - .265	10A/125V
5000.072	6'	18/3 SJT	Black		International	.300 - .335	10A/125V
* 5000.079	6' 7"	18/3 SJT	Black		International	.300 - .335	10A/125V
5000.096	8'	18/3 SJT	Black		International	.300 - .335	10A/125V
5000.120	10'	18/3 SJT	Black		International	.300 - .335	10A/125V
* 5020.072	6'	16/3 SJT	Black		International	.335 - .360	13A/125V
5020.090	7'	16/3 SJT	Black		International	.335 - .360	13A/125V
5020.096	8'	16/3 SJT	Black		International	.335 - .360	13A/125V
5020.120	10'	16/3 SJT	Black		International	.335 - .360	13A/125V
5041.072	6'	14/3 SJT	Black		International	.360 - .395	15A/125V
5041.079	6' 7"	14/3 SJT	Black		International	.360 - .395	15A/125V
5041.096	8'	14/3 SJT	Black		International	.360 - .395	15A/125V
5041.118	9' 8"	14/3 SJT	Black		International	.360 - .395	15A/125V
5041.120	10'	14/3 SJT	Black		International	.360 - .395	15A/125V
* 6000.072	6'	18/3 SJT Shielded	Black		International	.300 - .335	10A/125V
6000.079	6' 7"	18/3 SJT Shielded	Black		International	.300 - .335	10A/125V
6000.096	8'	18/3 SJT Shielded	Black		International	.300 - .335	10A/125V
6000.120	10'	18/3 SJT Shielded	Black		International	.300 - .335	10A/125V
* 7420.072	6'	18/3 SVT Shielded	Black		International	.230 - .265	10A/125V
7420.079	6' 7"	18/3 SVT Shielded	Black		International	.230 - .265	10A/125V
7420.096	8'	18/3 SVT Shielded	Black		International	.230 - .265	10A/125V
7420.120	10'	18/3 SVT Shielded	Black		International	.230 - .265	10A/125V
7427.079	6' 7"	18/3 SVT Double Shielded	Black		International	.230 - .265	10A/125V
7427.118	9' 10"	18/3 SVT Double Shielded	Black		International	.230 - .265	10A/125V
5044.072	6'	14/3 SJT Shielded	Black		International	.360 - .395	15A/125V

● NEMA 5-15P to IEC-60320-C13 - with Ferrite Beads

APPROVALS: UL, CSA



NEMA 5-15P




IEC-60320-C13



Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
7420.079F	6' 7"	18/3 SVT Shielded	Black		International	.230 - .265	10A/125V

● NEMA 5-15P to IEC-60320-C13L (Left Angle)

APPROVALS: UL, CSA



NEMA 5-15P

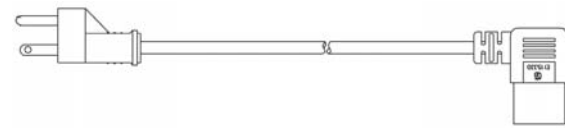


IEC-60320-C13 Left Angle



Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
5023.072	6'	18/3 SJT	Black		International	.300 - .335	10A/125V
5023.096	8'	18/3 SJT	Black		International	.300 - .335	10A/125V
5023.120	10'	18/3 SJT	Black		International	.300 - .335	10A/125V
5022.072	6'	16/3 SJT	Black		International	.335 - .360	13A/125V
5022.096	8'	16/3 SJT	Black		International	.335 - .360	13A/125V
5022.120	10'	16/3 SJT	Black		International	.335 - .360	13A/125V
5024.072	6'	14/3 SJT	Black		International	.360 - .395	15A/125V
5024.096	8'	14/3 SJT	Black		International	.360 - .395	15A/125V
5024.120	10'	14/3 SJT	Black		International	.360 - .395	15A/125V

● NEMA 5-15P to IEC-60320-C13R (Right Angle)

APPROVALS: UL, CSA




NEMA 5-15P

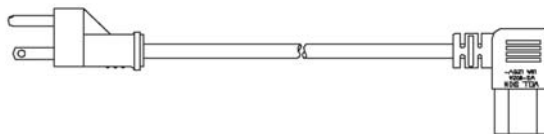



IEC-60320-C13 Right Angle

Part Number	Length	Wire Type	Color		NOM O.D. (inches)	Rating
			Jacket	Conductors		
4916.036	3'	18/3 SVT	Black	N. American	.230 - .265	10A/125V
4916.048	4'	18/3 SVT	Black	N. American	.230 - .265	10A/125V
4916.108	9'	18/3 SVT	Black	N. American	.230 - .265	10A/125V

APPROVALS: UL, CSA



NEMA 5-15P

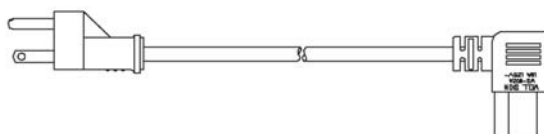


IEC-60320-C13 Right Angle


Part Number	Length	Wire Type	Color		NOM O.D. (inches)	Rating
			Jacket	Conductors		
4910.024	2'	18/3 SJT	Black	International	.300 - .335	10A/125V
4910.036	3'	18/3 SJT	Black	International	.300 - .335	10A/125V
4910.072	6'	18/3 SJT	Black	International	.300 - .335	10A/125V
* 4910.079	6' 7"	18/3 SJT	Black	International	.300 - .335	10A/125V
4910.096	8'	18/3 SJT	Black	International	.300 - .335	10A/125V
4910.108	9'	18/3 SJT	Black	International	.300 - .335	10A/125V
4910.120	10'	18/3 SJT	Black	International	.300 - .335	10A/125V
4910.168	14'	18/3 SJT	Black	International	.300 - .335	10A/125V
4910.192	16'	18/3 SJT	Black	International	.300 - .335	10A/125V
4911.036	3'	16/3 SJT	Black	International	.335 - .360	13A/125V
4911.072	6'	16/3 SJT	Black	International	.335 - .360	13A/125V
4911.079	6' 7"	16/3 SJT	Black	International	.335 - .360	13A/125V
* 4911.096	8'	16/3 SJT	Black	International	.335 - .360	13A/125V
4911.120	10'	16/3 SJT	Black	International	.335 - .360	13A/125V
* 4912.072	6'	14/3 SJT	Black	International	.360 - .395	15A/125V
4912.096	8'	14/3 SJT	Black	International	.360 - .395	15A/125V
4912.120	10'	14/3 SJT	Black	International	.360 - .395	15A/125V
4913.120	10'	18/3 SJTW Shielded	Black	International	.300 - .335	10A/125V

● NEMA 5-15P to IEC-60320-C13UA (Up Angle)

APPROVALS: UL, CSA



NEMA 5-15P

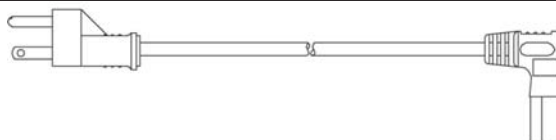


IEC-60320-C13 Up Angle


Part Number	Length	Wire Type	Color		NOM O.D. (inches)	Rating
			Jacket	Conductors		
5038.072	6'	16/3 SJT	Black	N. American	.335 - .360	13A/125V

● NEMA 5-15P to IEC-60320-C13DA (Down Angle)

APPROVALS: UL, CSA



NEMA 5-15P

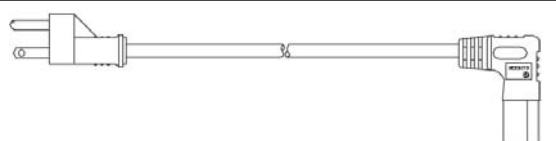




IEC-60320-C13 Down Angle

Part Number	Length	Wire Type	Color		NOM O.D. (inches)	Rating
			Jacket	Conductors		
5011.072	6'	18/3 SJT	Black	N. American	.300 - .335	10A / 125V



● NEMA 5-15P to IEC-60320-C13DA (Down Angle) - Continued



APPROVALS: UL, CSA

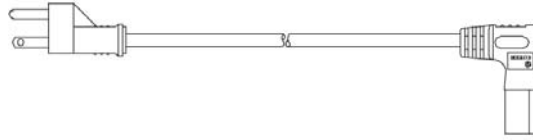

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
4929.108	9'	18/3 SJT	Black		International	.300 - .335	10A/125V
4929.180	15'	18/3 SJT	Black		International	.300 - .335	10A/125V

● NEMA 5-15P to IEC-60320-C15



APPROVALS: UL, CSA



Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
* 2502.072	6'	18/3 SVT	Black		N. American	.230 - .265	10A/125V
1683.120	10'	14/3 SJT	Black		N. American	.360 - .395	15A/125V
1683.144	12'	14/3 SJT	Black		N. American	.360 - .395	15A/125V

● NEMA 5-15P to IEC-60320-C5



APPROVALS: UL, CSA



Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
* 1090.072	6'	18/3 SPT-2	Black		-	.146 x .345	10A/125V

● NEMA 5-15P to IEC-60320-C5R (Right Angle)



APPROVALS: UL, CSA



Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
1092.072	6'	18/3 SVT	White		International	.230 - .265	2.5A/125V

● NEMA 5-15P to NEMA 5-15R - with warning label

APPROVALS: UL, CSA




Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
5314.072	6'	18/3 SJTW	Black		N. American	.300 - .335	10A/125V
5314.120	10'	18/3 SJTW	Black		N. American	.300 - .335	10A/125V
5315.010	10"	16/3 SJT	Black		N. American	.335 - .360	13A/125V
5315.016	1' 4"	16/3 SJT	Black		N. American	.335 - .360	13A/125V
5315.036	3'	16/3 SJT	Black		N. American	.335 - .360	13A/125V
* 5315.072	6'	16/3 SJT	Black		N. American	.335 - .360	13A/125V
5315.120	10'	16/3 SJT	Black		N. American	.335 - .360	13A/125V
5315.180	15'	16/3 SJT	Black		N. American	.335 - .360	13A/125V
5315.300	25'	16/3 SJT	Black		N. American	.335 - .360	13A/125V
5315.360	30'	16/3 SJT	Black		N. American	.335 - .360	13A/125V
5317.072	6'	14/3 SJT	Black		N. American	.360 - .395	15A/125V
5317.120	10'	14/3 SJT	Black		N. American	.360 - .395	15A/125V
5317.180	15'	14/3 SJT	Black		N. American	.360 - .395	15A/125V


\* This symbol means that these are our most commonly stocked items within a series. Look for this symbol throughout our catalog for fast shipment.

● NEMA 5-15P to Standard ROJ (Remove Outer Jacket)

APPROVALS: UL, CSA




NEMA 5-15P




Standard ROJ

Part Number	Length	Wire Type	Color		NOM O.D. (inches)	Rating
			Jacket	Conductors		
2380.018	1' 6"	18/3 SVT	Black	N. American	.230 - .265	10A/125V
2380.036	3'	18/3 SVT	Black	N. American	.230 - .265	10A/125V
* 2380.072	6'	18/3 SVT	Black	N. American	.230 - .265	10A/125V
* 2380.096	8'	18/3 SVT	Black	N. American	.230 - .265	10A/125V
2380.120	10'	18/3 SVT	Black	N. American	.230 - .265	10A/125V
* 2390.036	3'	18/3 SVT	Grey	N. American	.230 - .265	10A/125V
2390.096	8'	18/3 SVT	Grey	N. American	.230 - .265	10A/125V
2390.144	12'	18/3 SVT	Grey	N. American	.230 - .265	10A/125V
* 7480.072	6'	18/3 SJT	Black	N. American	.300 - .335	10A/125V
* 7480.096	8'	18/3 SJT	Black	N. American	.300 - .335	10A/125V
7480.120	10'	18/3 SJT	Black	N. American	.300 - .335	10A/125V
5140.072	6'	16/3 SJT	Black	N. American	.335 - .360	13A/125V
* 5140.096	8'	16/3 SJT	Black	N. American	.335 - .360	13A/125V
5140.120	10'	16/3 SJT	Black	N. American	.335 - .360	13A/125V
* 5160.072	6'	14/3 SJT	Black	N. American	.360 - .395	15A/125V
* 5160.096	8'	14/3 SJT	Black	N. American	.360 - .395	15A/125V
* 5160.120	10'	14/3 SJT	Black	N. American	.360 - .395	15A/125V
4062.072	6'	14/3 SJ	Black	N. American	.360 - .395	15A/125V

APPROVALS: UL, CSA



NEMA 5-15P




Standard ROJ


Part Number	Length	Wire Type	Color		NOM O.D. (inches)	Rating
			Jacket	Conductors		
2381.072	6'	18/3 SVT	Black	International	.230 - .265	10A/125V
2381.096	8'	18/3 SVT	Black	International	.230 - .265	10A/125V
2381.120	10'	18/3 SVT	Black	International	.230 - .265	10A/125V
5120.072	6'	18/3 SJT	Black	International	.300 - .335	10A/125V
5120.079	6' 7"	18/3 SJT	Black	International	.300 - .335	10A/125V
5120.096	8'	18/3 SJT	Black	International	.300 - .335	10A/125V
5120.120	10'	18/3 SJT	Black	International	.300 - .335	10A/125V
5141.072	6'	16/3 SJT	Black	International	.335 - .360	13A/125V
5141.096	8'	16/3 SJT	Black	International	.335 - .360	13A/125V
5141.120	10'	16/3 SJT	Black	International	.335 - .360	13A/125V
5161.072	6'	14/3 SJT	Black	International	.360 - .395	15A/125V
5161.096	8'	14/3 SJT	Black	International	.360 - .395	15A/125V
5161.120	10'	14/3 SJT	Black	International	.360 - .395	15A/125V
7250.079	6' 7"	18/3 SVT Shielded	Black	International	.230 - .265	10A/125V
5047.118	9' 10"	14/3 SJT Shielded	Black	International	.360 - .395	15A/125V

● NEMA 5-15P to Standard Split

APPROVALS: UL, CSA



NEMA 5-15P





Standard Split

Part Number	Length	Wire Type	Color		NOM O.D. (inches)	Rating
			Jacket	Conductors		
1000.072	6'	18/3 SPT-2	Black	-	.146 x .345	10A/125V
* 1000.096	8'	18/3 SPT-2	Black	-	.146 x .345	10A/125V
1000.120	10'	18/3 SPT-2	Black	-	.146 x .345	10A/125V

\* This symbol means that these are our most commonly stocked items within a series. Look for this symbol throughout our catalog for fast shipment.

● NEMA 5-15P to Standard Split - Continued

APPROVALS: UL, CSA






NEMA 5-15P

Standard Split

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
* 1100.036	3'	16/3 SPT-2	Black		-	.158 x .380	13A/125V
* 1100.072	6'	16/3 SPT-2	Black		-	.158 x .380	13A/125V
1100.096	8'	16/3 SPT-2	Black		-	.158 x .380	13A/125V
1100.120	10'	16/3 SPT-2	Black		-	.158 x .380	13A/125V
1100.300	25'	16/3 SPT-2	Black		-	.158 x .380	13A/125V
1200.072	6'	14/3 SPT-3	Black		-	.235 x .510	15A/125V
1200.096	8'	14/3 SPT-3	Black		-	.235 x .510	15A/125V
1200.120	10'	14/3 SPT-3	Black		-	.235 x .510	15A/125V

● NEMA 5-15PDA (Down Angle) to IEC-60320-C13

APPROVALS: UL, CSA






NEMA 5-15P, Down Angle

IEC-60320-C13

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
* 2503.072	6'	18/3 SVT	Black	N. American		.230 - .265	10A/125V
5033.018	1' 6"	16/3 SJTW	Black	N. American		.335 - .360	13A/125V
5033.024	2'	16/3 SJTW	Black	N. American		.335 - .360	13A/125V
5033.036	3'	16/3 SJTW	Black	N. American		.335 - .360	13A/125V
5033.096	8'	16/3 SJTW	Black	N. American		.335 - .360	13A/125V

● NEMA 5-15PDA (Down Angle) to IEC-60320-C13L (Left Angle)

APPROVALS: UL, CSA






NEMA 5-15P, Down Angle

IEC-60320-C13 Left Angle

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
* 5036.120	10'	18/3 SJT	Black	International		.300 - .335	10A/125V

● NEMA 5-15PDA (Down Angle) to IEC-60320-C13R (Right Angle)

APPROVALS: UL, CSA






NEMA 5-15P, Down Angle

IEC-60320-C13 Right Angle

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
5037.072	6'	16/3 SJTO	Black	N. American		.335 - .360	13A/125V

● NEMA 5-15PDA (Down Angle) to Standard ROJ (Remove Outer Jacket)

APPROVALS: UL, CSA



NEMA 5-15P, Down Angle

Standard ROJ

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
* 5165.138S	11' 6"	14/3 SJT	Black	N. American		.360 - .395	15A/125V

\* This symbol means that these are our most commonly stocked items within a series. Look for this symbol throughout our catalog for fast shipment.

● NEMA 5-15PDR (360° Rotating) to IEC-60320-C13

APPROVALS: UL, CSA




NEMA 5-15P 360° Rotating

IEC-60320-C13

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
* 5501.096	8'	18/3 SJT	Black	N. American		.300 - .335	10A/125V

● NEMA 1-15P to NEMA 1-15R

APPROVALS: UL, CSA



NEMA 1-15P

NEMA 1-15R

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
1905.096	8'	18/2 SJTW	Black	N. American		.280 x .315	10A/125V

Note: If ordering a polarized version, simply end the part number with "P"

● NEMA 1-15P to IEC-60320-C7

APPROVALS: UL, CSA



NEMA 1-15P

IEC-60320-C7

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
1062.018	1' 4"	18/2 SPT-2	Black		-	.138 x .265	7A/125V
* 1062.079	6' 7"	18/2 SPT-2	Black		-	.138 x .265	7A/125V
1062.180	15'	18/2 SPT-2	Black		-	.138 x .265	7A/125V

● NEMA 1-15P to IEC-60320-C17

APPROVALS: UL, CSA



NEMA 1-15P


IEC-60320-C17

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
* 2062.072	6'	18/2 SVT	Black	N. American		.220 - .255	10A/125V
2062.098	8' 2"	18/2 SVT	Black	N. American		.220 - .255	10A/125V

Note: If ordering a polarized version, simply end the part number with "P"

● NEMA 1-15P to Standard ROJ (Remove Outer Jacket)

APPROVALS: UL, CSA



NEMA 1-15P

Standard ROJ


Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
2050.072	6'	18/2 SVT	Black	N. American		.220 - .255	10A/125V
2050.096	8'	18/2 SVT	Black	N. American		.220 - .255	10A/125V
2050.120	10'	18/2 SVT	Black	N. American		.220 - .255	10A/125V
2050.144	12'	18/2 SVT	Black	N. American		.220 - .255	10A/125V
2060.072	6'	18/2 SJT	Black	N. American		.280 - .315	10A/125V
2060.096	8'	18/2 SJT	Black	N. American		.280 - .315	10A/125V
2060.120	10'	18/2 SJT	Black	N. American		.280 - .315	10A/125V
2060.144	12'	18/2 SJT	Black	N. American		.280 - .315	10A/125V
2070.072	6'	16/2 SJT	Black	N. American		.305 - .340	13A/125V
2070.096	8'	16/2 SJT	Black	N. American		.305 - .340	13A/125V
2070.120	10'	16/2 SJT	Black	N. American		.305 - .340	13A/125V
2070.144	12'	16/2 SJT	Black	N. American		.305 - .340	13A/125V

Note: If ordering a polarized version, simply end the part number with "P"

\* This symbol means that these are our most commonly stocked items within a series. Look for this symbol throughout our catalog for fast shipment.

● **NEMA 1-15P to Standard ROJ** (Remove Outer Jacket) - Continued

APPROVALS: UL, CSA



NEMA 1-15P


Standard ROJ

Part Number	Length	Wire Type	Color		NOM O.D. (inches)	Rating
			Jacket	Conductors		
2080.072	6'	14/2 SJT	Black	N. American	.335 - .375	15A/125V
2080.096	8'	14/2 SJT	Black	N. American	.335 - .375	15A/125V
2080.120	10'	14/2 SJT	Black	N. American	.335 - .375	15A/125V
2080.144	12'	14/2 SJT	Black	N. American	.335 - .375	15A/125V

Note: If ordering a polarized version, simply end the part number with "P"

● **NEMA 1-15P to Standard Split**

APPROVALS: UL, CSA



NEMA 1-15P



Standard Split

Part Number	Length	Wire Type	Color		NOM O.D. (inches)	Rating
			Jacket	Conductors		
1060.072	6'	18/2 SPT-1	Black	-	.106 x .208	10A/125V
1060.096	8'	18/2 SPT-1	Black	-	.106 x .208	10A/125V
1060.120	10'	18/2 SPT-1	Black	-	.106 x .208	10A/125V
1060.144	12'	18/2 SPT-1	Black	-	.106 x .208	10A/125V
1070.072	6'	18/2 SPT-2	Black	-	.138 x .265	10A/125V
1070.096	8'	18/2 SPT-2	Black	-	.138 x .265	10A/125V
1070.120	10'	18/2 SPT-2	Black	-	.138 x .265	10A/125V
1070.144	12'	18/2 SPT-2	Black	-	.138 x .265	10A/125V
1080.072	6'	18/2 SPT-3	Black	-	.175 x .336	10A/125V
1080.096	8'	18/2 SPT-3	Black	-	.175 x .336	10A/125V
1080.120	10'	18/2 SPT-3	Black	-	.175 x .336	10A/125V
1080.144	12'	18/2 SPT-3	Black	-	.175 x .336	10A/125V
1010.072	6'	16/2 SPT-2	Black	-	.156 x .302	13A/125V
1010.096	8'	16/2 SPT-2	Black	-	.156 x .302	13A/125V
1010.120	10'	16/2 SPT-2	Black	-	.156 x .302	13A/125V
1010.144	12'	16/2 SPT-2	Black	-	.156 x .302	13A/125V
1020.072	6'	16/2 SPT-3	Black	-	.190 x .363	13A/125V
1020.096	8'	16/2 SPT-3	Black	-	.190 x .363	13A/125V
1020.120	10'	16/2 SPT-3	Black	-	.190 x .363	13A/125V
1020.144	12'	16/2 SPT-3	Black	-	.190 x .363	13A/125V
1030.072	6'	14/2 SPT-3	Black	-	.235 x .420	15A/125V
1030.096	8'	14/2 SPT-3	Black	-	.235 x .420	15A/125V
1030.120	10'	14/2 SPT-3	Black	-	.235 x .420	15A/125V
1030.144	12'	14/2 SPT-3	Black	-	.235 x .420	15A/125V

Note: If ordering a polarized version, simply end the part number with "P"

● **NEMA 1-15PP (Polarized) to IEC-60320-C7P (Polarized)**

APPROVALS: UL, CSA






NEMA 1-15P, Polarized

IEC-60320-C7, Polarized

Part Number	Length	Wire Type	Color		NOM O.D. (inches)	Rating
			Jacket	Conductors		
* 1068.079	6' 7"	18/2 SPT-2	Black	-	.138 x .265	7A/125V

● **NEMA 1-15PP (Polarized) to IEC-60320-C17L (Left Angle)**

APPROVALS: UL, CSA




NEMA 1-15P, Polarized

IEC-60320-C17  
Left Angle

Part Number	Length	Wire Type	Color		NOM O.D. (inches)	Rating
			Jacket	Conductors		
2068.072S	6'	18/2 SVT	Black	N. American	.220 - .255	10A/125V

● NEMA 1-15P Fused to Standard Split

APPROVALS: UL, CSA

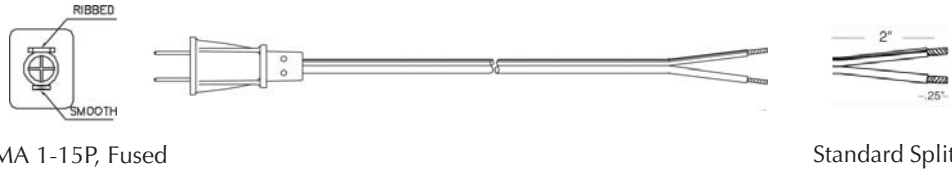

NEMA 1-15P, Fused

Standard Split

Part Number	Length	Fuse	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
* 1076.096	8'	.5A	18/2 SPT-2	White		-	.138 x .265	10A/125V

● IEC-60320-C8 to IEC-60320-C7

APPROVALS: UL, CSA



IEC-60320-C8


IEC-60320-C7

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
2203.079	6' 7"	18/2 SPT-2	Black		-	.138 x .265	2.5A/250V

Universal

IEC-60320-C14 to IEC-60320-C5

APPROVALS: UL, CSA, VDE, CE




IEC-60320-C14

IEC-60320-C5

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D.	Rating
3506.072	1.8 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
3507.098	2.5 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V

● IEC-60320-C14 to IEC-60320-C7



IEC-60320-C14

IEC-60320-C7

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D.	Rating
2200.072	6'	18/2 SPT-2	Black		N. American	.138 - .265	10A/250V

Universal

IEC-60320-C14 to IEC-60320-C13

APPROVALS: UL, CSA, VDE, CE



IEC-60320-C14


IEC-60320-C13

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D.	Rating
* 3500.006	.15 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
* 3500.012	.30 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
* 3500.018	.50 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
* 3500.024	.60 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
* 3500.039	1.0 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
* 3500.048	1.2 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
* 3500.059	1.5 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
* 3500.079	2.0 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
3500.090	2.3 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
* 3500.098	2.5 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
* 3500.120	3.05 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
3500.158	4.0 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
3508.014	.36 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SVT	Black		International	7.0 mm	10A/250V



\* This symbol means that these are our most commonly stocked items within a series. Look for this symbol throughout our catalog for fast shipment.

● IEC-60320-C14 to IEC-60320-C13 - Continued

APPROVALS: UL, CSA



IEC-60320-C14




IEC-60320-C13

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D.	Rating
5241.012	1'	18/3 SVT	Black	International	.230 - .265	10A/250V	
5241.039	3' 3"	18/3 SVT	Black	International	.230 - .265	10A/250V	
5241.072	6'	18/3 SVT	Black	International	.230 - .265	10A/250V	
5241.079	6' 7"	18/3 SVT	Black	International	.230 - .265	10A/250V	
6250.012	1'	16/3 SJT	Black	International	.335 - .360	13A/250V	
6250.024	2'	16/3 SJT	Black	International	.335 - .360	13A/250V	
6250.039	3' 3"	16/3 SJT	Black	International	.335 - .360	13A/250V	
6250.072	6'	16/3 SJT	Black	International	.335 - .360	13A/250V	
6250.079	6' 7"	16/3 SJT	Black	International	.335 - .360	13A/250V	
6260.012	1'	14/3 SJT	Black	International	.360 - .395	15A/250V	
6260.024	2'	14/3 SJT	Black	International	.360 - .395	15A/250V	
6260.039	3' 3"	14/3 SJT	Black	International	.360 - .395	15A/250V	
6260.064	5' 4"	14/3 SJT	Black	International	.360 - .395	15A/250V	
6260.072	6'	14/3 SJT	Black	International	.360 - .395	15A/250V	
6260.079	6' 7"	14/3 SJT	Black	International	.360 - .395	15A/250V	
6260.096	8'	14/3 SJT	Black	International	.360 - .395	15A/250V	



Universal

IEC-60320-C14 to IEC-60320-C13R (Right Angle)

APPROVALS: UL, CSA, VDE, CE



IEC-60320-C14

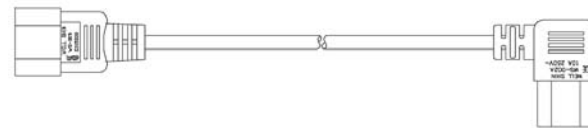


IEC-60320-C13 Right Angle

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D.	Rating
* 3514.018	.50 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black	International	7.0 mm	10A/250V	
* 3514.039	1.0 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black	International	7.0 mm	10A/250V	
3514.072	1.8 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black	International	7.0 mm	10A/250V	
* 3514.079	2.0 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black	International	7.0 mm	10A/250V	
3514.120	3.05 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black	International	7.0 mm	10A/250V	
3514.158	4.0 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black	International	7.0 mm	10A/250V	

● IEC-60320-C14 to IEC-60320-C15

APPROVALS: UL, CSA



IEC-60320-C14




IEC-60320-C15


Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
6262.036	3'	14/3 SJT	Black	International	.360 - .395	15A/250V	
6262.072	6'	14/3 SJT	Black	International	.360 - .395	15A/250V	
6262.120	10'	14/3 SJT	Black	International	.360 - .395	15A/250V	

● IEC-60320-C14 to NEMA 5-15R

APPROVALS: UL, CSA



IEC-60320-C14




NEMA 5-15R

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
5250.008	8"	18/3 SVT	Black	N. American	.230 - .265	10A/125V	
5250.012	1'	18/3 SVT	Black	N. American	.230 - .265	10A/125V	
* 5250.036	3'	18/3 SVT	Black	N. American	.230 - .265	10A/125V	
5250.072	6'	18/3 SVT	Black	N. American	.230 - .265	10A/125V	
5252.008	8"	16/3 SJT	Black	N. American	.335 - .360	13A/125V	
5252.012	1'	16/3 SJT	Black	N. American	.335 - .360	13A/125V	
5252.036	3'	16/3 SJT	Black	N. American	.335 - .360	13A/125V	
5252.072	6'	16/3 SJT	Black	N. American	.335 - .360	13A/125V	
5251.008	8"	14/3 SJT	Black	N. American	.360 - .395	15A/125V	
5251.012	1'	14/3 SJT	Black	N. American	.360 - .395	15A/125V	
5251.036	3'	14/3 SJT	Black	N. American	.360 - .395	15A/125V	
5251.072	6'	14/3 SJT	Black	N. American	.360 - .395	15A/125V	

● IEC-60320-C14 to Standard ROJ (Remove Outer Jacket)

APPROVALS: UL, CSA

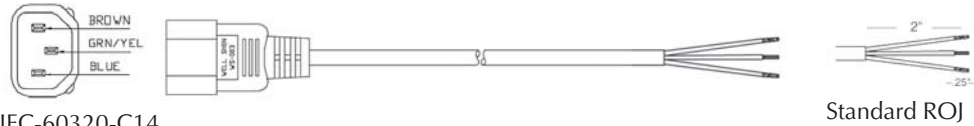

IEC-60320-C14


Standard ROJ

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
5254.012	1'	18/3 SVT	Black		International	.230 - .265	10A/250V
5254.039	3' 3"	18/3 SVT	Black		International	.230 - .265	10A/250V
5254.072	6'	18/3 SVT	Black		International	.230 - .265	10A/250V
5254.079	6' 7"	18/3 SVT	Black		International	.230 - .265	10A/250V
5253.012	1'	18/3 SJT	Black		International	.300 - .335	10A/250V
5253.039	3' 3"	18/3 SJT	Black		International	.300 - .335	10A/250V
5253.072	6'	18/3 SJT	Black		International	.300 - .335	10A/250V
5253.079	6' 7"	18/3 SJT	Black		International	.300 - .335	10A/250V
5255.012	1'	16/3 SJT	Black		International	.335 - .360	13A/250V
5255.039	3' 3"	16/3 SJT	Black		International	.335 - .360	13A/250V
5255.072	6'	16/3 SJT	Black		International	.335 - .360	13A/250V
5255.079	6' 7"	16/3 SJT	Black		International	.335 - .360	13A/250V
5256.012	1'	14/3 SJT	Black		International	.360 - .395	15A/250V
5256.039	3' 3"	14/3 SJT	Black		International	.360 - .395	15A/250V
5256.072	6'	14/3 SJT	Black		International	.360 - .395	15A/250V
5256.079	6' 7"	14/3 SJT	Black		International	.360 - .395	15A/250V

Universal

IEC-60320-C14L (Left Angle) to IEC-60320-C13

APPROVALS: UL, CSA, VDE, CE

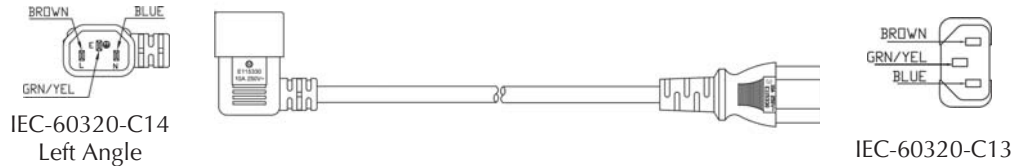

IEC-60320-C14 Left Angle


IEC-60320-C13

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D.	Rating
3525.024	.61 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
3525.036	.91 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
3525.048	1.2 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
3525.060	1.5 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
3525.072	1.8 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
3525.076	2.0 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V

Universal

IEC-60320-C14L (Left Angle) to IEC-60320-C13L (Left Angle)

APPROVALS: UL, CSA, VDE, CE

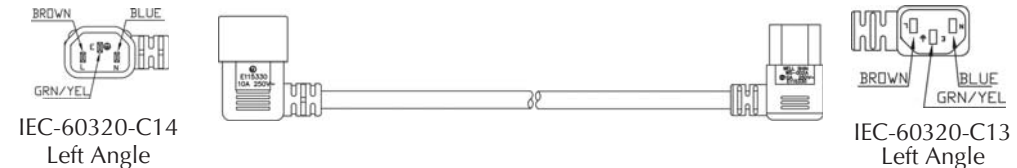

IEC-60320-C14 Left Angle


IEC-60320-C13 Left Angle

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D.	Rating
* 3524.010	.25 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V

Universal

IEC-60320-C14R (Right Angle) to IEC-60320-C13

APPROVALS: UL, CSA, VDE, CE

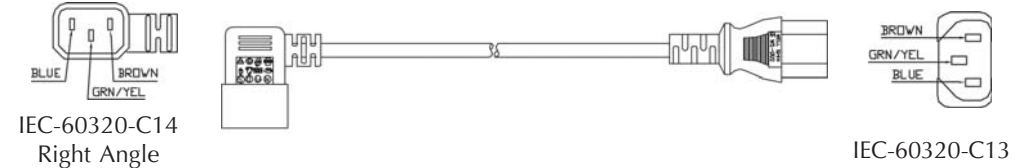

IEC-60320-C14 Right Angle

IEC-60320-C13


Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D.	Rating
3523.012	.30 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
3523.018	.46 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
* 3523.024	.61 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
3523.048	1.2 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
3523.060	1.5 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
3523.072	1.8 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
3523.079	2.0 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V
3523.096	2.5 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black		International	7.0 mm	10A/250V

\* This symbol means that these are our most commonly stocked items within a series. Look for this symbol throughout our catalog for fast shipment.



Universal

IEC-60320-C14R (Right Angle) to IEC-60320-C13L (Left Angle)

APPROVALS: UL, CSA, VDE, CE




IEC-60320-C14 Right Angle





IEC-60320-C13 Left Angle

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D.	Rating
3520.144	3.6 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black	International	7.0 mm	10A/250V	

APPROVALS: UL, CSA



IEC-60320-C14 Right Angle




IEC-60320-C13 Left Angle

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
6255.016	1' 4"	16/3 SJT Shielded	Black	N. American	.335 - .360	13A/250V	
6255.024	2'	16/3 SJT Shielded	Black	N. American	.335 - .360	13A/250V	



Universal

IEC-60320-C14R (Right Angle) to IEC-60320-C13R (Right Angle)

APPROVALS: UL, CSA, VDE, CE



IEC-60320-C14 Right Angle

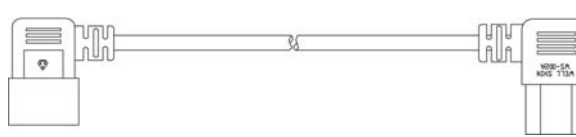


IEC-60320-C13 Right Angle

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D.	Rating
3513.036	.91 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black	International	7.0 mm	10A/250V	
3513.039	1.0 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black	International	7.0 mm	10A/250V	
3513.084	2.1 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black	International	7.0 mm	10A/250V	


Universal

IEC-60320-C14DA (Down Angle) to IEC-60320-C13

APPROVALS: UL, CSA, VDE, CE



IEC-60320-C14 Down Angle

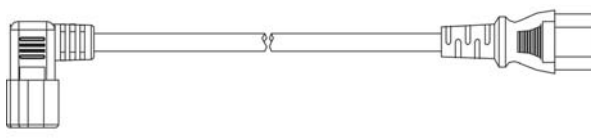


IEC-60320-C13


Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D.	Rating
3526.072	1.8 meters	H05VV-F3G1.0mm <sup>2</sup> /18/3 SJT	Black	International	7.0 mm	10A/250V	

● IEC-60320-C18 to IEC-60320-C7

APPROVALS: UL, CSA



IEC-60320-C18




IEC-60320-C7



Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
2202.039	3' 3"	18/2 SPT-2	Black	-	-	.138 x .395	10A/250V
* 2202.054	4' 6"	18/2 SPT-2	Black	-	-	.138 x .395	10A/250V
2202.079	6' 7"	18/2 SPT-2	Black	-	-	.138 x .395	10A/250V
2202.084	7'	18/2 SPT-2	Black	-	-	.138 x .395	10A/250V
2202.120	10'	18/2 SPT-2	Black	-	-	.138 x .395	10A/250V

● IEC-60320-C18 to NEMA 1-15R

APPROVALS: UL, CSA



IEC-60320-C18



NEMA 1-15R

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
5232.036	3'	18/2 SVT 105°C	Black	-	-	.220 - .255	10A/125V

● NEMA 1-15R to Standard Split

APPROVALS: UL, CSA

NEMA 1-15R

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
1901.060	5'	18/2 SPT-1	Black	-	-	.106 x .208	10A/125V

● IEC-60320-C5R (Right Angle) to Standard ROJ (Remove Outer Jacket)

APPROVALS: UL, CSA

IEC-60320-C5 Right Angle

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
0155.040	3' 4"	18/3 SVT	Black	International	International	.230 - .265	10A/250V
0156.072	6'	18/3 SVT	White	International	International	.230 - .265	10A/250V

● IEC-60320-C13 to Standard ROJ (Remove Outer Jacket)

APPROVALS: UL, CSA

IEC-60320-C13

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
0104.036	3'	18/3 SVT	Black	N. American	N. American	.230 - .265	10A/250V
0104.048	4'	18/3 SVT	Black	N. American	N. American	.230 - .265	10A/250V
0104.072	6'	18/3 SVT	Black	N. American	N. American	.230 - .265	10A/250V
0104.098	8' 2"	18/3 SVT	Black	N. American	N. American	.230 - .265	10A/250V
0126.096H	8'	16/3 SJT 105° C	Black	N. American	N. American	.335 - .360	13A/250V
0138.096	8'	14/3 SJTO	Black	N. American	N. American	.360 - .395	15A/250V

APPROVALS: UL, CSA

IEC-60320-C13

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
0100.072	6'	18/3 SVT	Black	International	International	.230 - .265	10A/250V
0100.096	8'	18/3 SVT	Black	International	International	.230 - .265	10A/250V
0100.120	10'	18/3 SVT	Black	International	International	.230 - .265	10A/250V
0127.120	10'	18/3 SJT	Black	International	International	.300 - .335	10A/250V
0109.024	2'	16/3 SJT	Black	International	International	.335 - .360	13A/250V
0109.039	3' 3"	16/3 SJT	Black	International	International	.335 - .360	13A/250V
0109.079	6' 7"	16/3 SJT	Black	International	International	.335 - .360	13A/250V
0105.048	4'	14/3 SJT	Black	International	International	.360 - .395	15A/250V
0105.055	4' 7"	14/3 SJT	Black	International	International	.360 - .395	15A/250V
0105.072	6'	14/3 SJT	Black	International	International	.360 - .395	15A/250V
0103.036	3'	18/3 SVT Shielded	Black	International	International	.230 - .265	10A/250V
0103.072	6'	18/3 SVT Shielded	Black	International	International	.230 - .265	10A/250V
0103.079	6' 7"	18/3 SVT Shielded	Black	International	International	.230 - .265	10A/250V
0103.090	7' 6"	18/3 SVT Shielded	Black	International	International	.230 - .265	10A/250V

● IEC-60320-C13L (Left Angle) to Standard ROJ (Remove Outer Jacket)

APPROVALS: UL, CSA

IEC-60320-C13 Left Angle

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
0111.034	2' 10"	18/3 SVT	Black	N. American	N. American	.230 - .265	10A/250V

● IEC-60320-C13R (Right Angle) to Standard ROJ (Remove Outer Jacket)

APPROVALS: UL, CSA

IEC-60320-C13  
Right Angle

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
0162.072	6'	14/3 SJT	Black	N. American		.360 - .395	15A/250V

● IEC-60320-C13R (Right Angle) to Blunt Cut

APPROVALS: UL, CSA

IEC-60320-C13  
Right Angle

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
0129.079HS	6' 7"	14/3 SJT 105° C	Black	International		.360 - .395	15A/250V
0129.153HS	12' 9"	14/3 SJT 105° C	Black	International		.360 - .395	15A/250V
0129.243HS	20' 3"	14/3 SJT 105° C	Black	International		.360 - .395	15A/250V

● IEC-60320-C15 to ROJ (Remove Outer Jacket)

APPROVALS: UL, CSA

IEC-60320-C15

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
0168.072	6'	18/3 SVT	Black	N. American		.230 - .265	10A/250V

● IEC-60320-C15R to Blunt Cut

APPROVALS: UL, CSA

IEC-60320-C15, Right Angle

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
0117.096	8'	16/3 SJT	Black	International		.335 - .360	13A/250V

● Standard ROJ (Remove Outer Jacket) to Standard ROJ (Remove Outer Jacket)

APPROVALS: UL, CSA

Standard ROJ

Part Number	Length	Wire Type	Jacket	Color	Conductors	NOM O.D. (inches)	Rating
0169.045	3' 11"	18/3 SJT	Black	N. American		.300 - .335	10A/300V

