



CUSTOMER: P/N: 5000.096 REV. APPROVED BY:

REVISIONS		
REV.	DESCRIPTION	DATE
△		2012/02/10
△		2012/06/29
△		2014/11/14
△		2021/07/02
△	head is changed to the exposed type, and the spec mark is added	2022/03/15

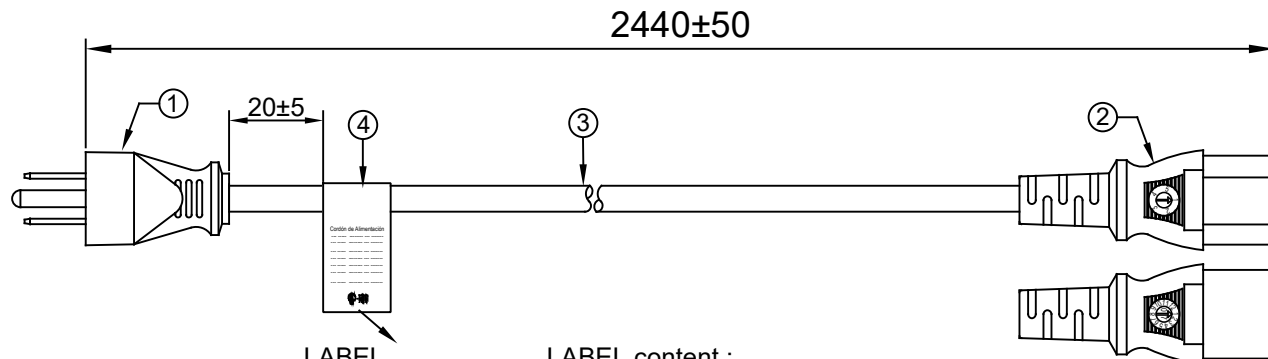



NOTES:

- Changhua production wire has CSA safety regulations (the cable has CSA on ZH(Zhang Hwa) factory) Changhua production begins with "H version" ZH(Zhang Hwa) factory begin from revision H
- The outer box must have RoHS mark (RoHS shown on the carton)
- Please refer to 0096-0001-1 REV B for online label spec (inline label please refer to 0096-0001-1 REV B) Please refer to 0096-0001-2 REV B for the spec of the outer box label (label on carton please refer to 0096-0001-2 REV B)

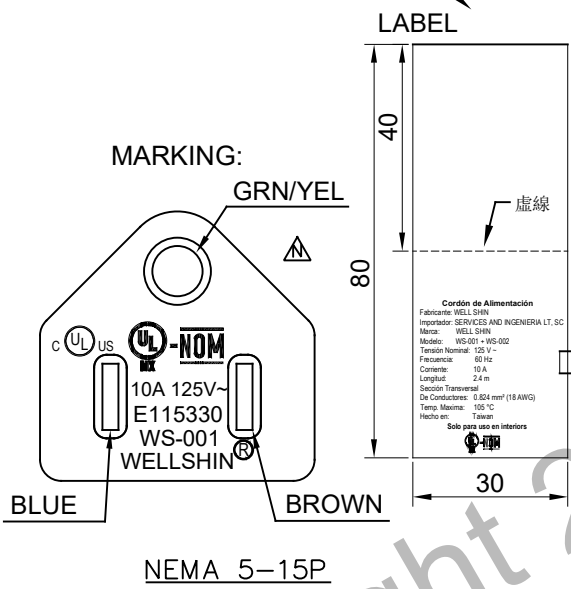

LABEL content :

Cordón de Alimentación
 Fabricante: WELL SHIN
 Importador: SERVICES AND INGENIERIA LT, SC
 Marca: WELL SHIN
 Modelo: WS-001 + WS-002
 Tensión Nominal: 125 V ~
 Frecuencia: 60 Hz
 Corriente: 10 A
 Longitud: 2.4 m
 Sección Transversal
 De Conductores: 0.824 mm² (18 AWG)
 Temp. Maxima: 105 °C
 Hecho en: Taiwan
Solo para uso en interiors

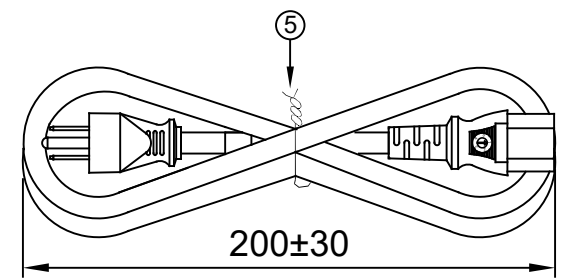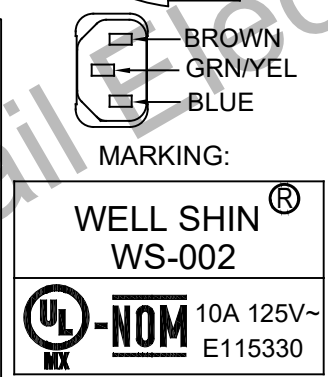

ITEM	DESCRIPTION	COLOR	Q'TY
⑤	Cable tie	BLACK	1
④	LABEL	---	1
③	SJTW 18AWG*3C 105°C APPROVAL : UL,C-UL(CSA)	BLACK	1
②	WS-002 10 (A) 125(V) APPROVAL : UL,CUL,NOM	BLACK	1
①	WS-001 10 (A) 125(V) APPROVAL : UL,CUL,NOM	BLACK	1

頭	尾	線種	線規	芯線數	溫度	顏色	總長度
WS-001	WS-002-1	SJTW	18AWG	3C	105°C	BLACK	2440mm

SIGNATURE			
SAFETY ENGINEER:			
MANAGER BY:			
CHECKED BY:			
DRAWN BY:		PRODUCT NO.:	DATE: 2022/03/15
		UNIT: mm	SHEET: 1 OF 1
		REV. N	